

Adaptor M12 male on rear / MSUD valve plug A-18mm

5-pol. A-cod.

Art.No.: 7000-41441-0000000

Weight: 0.03

Country of origin: CZ

Model designation: MSZLE-C

Form A (18 mm) - M12, connector at the rear

for pressure switches 24 V DC ±25% LED (yellow/green)

5-pole


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



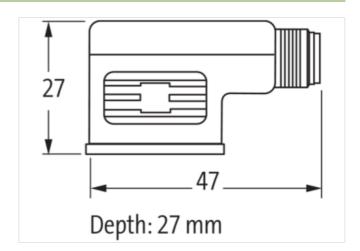


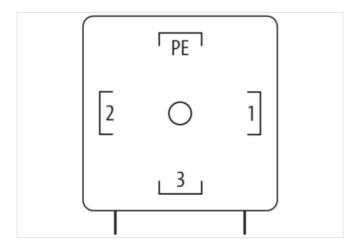

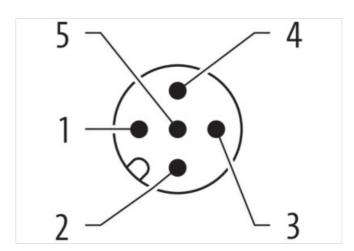



stay connected



Product may differ from Image









| Side 1 | |
|--|---|
| Family construction form | MSUD |
| Tightening torque | 0.4 Nm |
| Side 2 | |
| Family construction form | M12 |
| Tightening torque | 0.6 Nm |
| Commercial data | |
| URL Webshop | https://shop.murrelektronik.com/7000-41441-0000000 |
| EAN | 4048879144612 |
| Electrical data Supply | |
| Operating voltage DC | 24 V |
| Operating voltage DC min. | 18 V |
| Operating voltage DC max. | 30 V |
| Current operating per contact max. | 4 A |
| Diagnostics | |
| Status indication LED | green, yellow |
| Installation Connection | |
| Mounting set | M3 |
| Installation Pin assignment | |
| No. of poles | PE |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP67 |
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage | 0.8 kV |
| Material group (IEC 60664-1) | I |
| Environmental characteristics Climatic | c |
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |
| Important installation notes | |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-08-28



| Note on s | train relief |
|-----------|--------------|
|-----------|--------------|

Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.