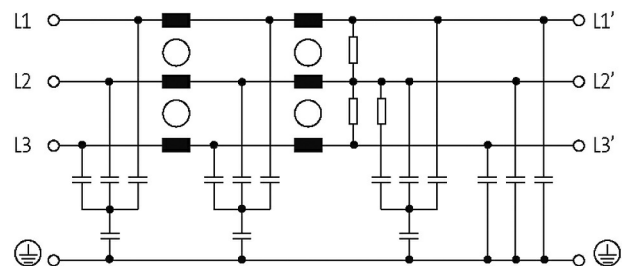
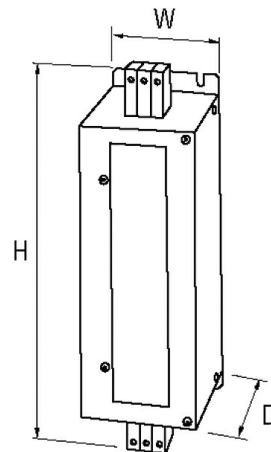



**MEF EMC-FILTER 3-PHASE 2-STAGE**

I:50A U:3x500 VAC book-style

Current: 50 A  
2-stage[Link to Product](#)**Illustration**

Product may differ from Image

**Approvals**

**Technical Data**

Operating voltage	max. 3× 500 V AC
Operating frequency	50...60 Hz
Overload current	18× (IN t) max. 0.5 ms; 1.5× (IN t) max. 1 min. (1× per hour)
Consumption	max. 15 mA (250 V AC)
Connection cross section	0.5...16 mm <sup>2</sup> single core (AWG 20...5); 0.5...10 mm <sup>2</sup> multiple core (AWG 20...7)

**General data**

Test isolation voltage	3.3 kV (L-N), 2 s; 3.1 kV (L-L), 2 s
Connection	Screw connection, touch protected
Mounting method	screw fixing
Dimensions H×W×D	295×70×177 mm
Climatic category	25/085/21 (EN 60068-1)

**Description**

Functional description	The 3-phase and 1-/2-stage EMC filters MEF 3/1-3/2 are used in the range 0.1...30 MHz and dampen interferences found in cables from the mains, supply units and control systems. They are suitable for TN-C-mains. The best results are obtained with short con
------------------------	---

**Commercial data**

country of origin	IT
customs tariff number	85363030
EAN	4048879029124
eClass	27130806
Packaging unit	1