
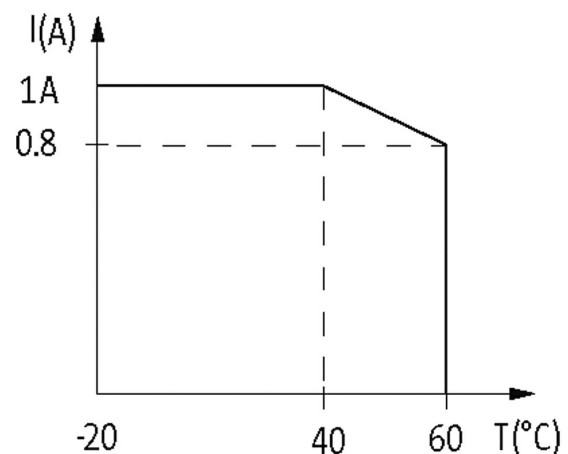
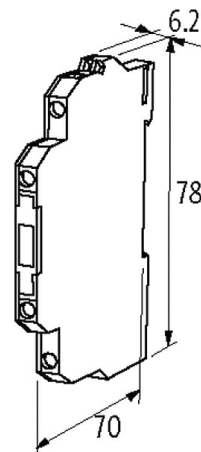


MIRO 6.2 24VDC 250VAC/DC-1A OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 350 VDC / 1 A

Transistor 1 A
 24 V DC
 Screw terminals
 Multi voltage output

[Link to Product](#)**Illustration**

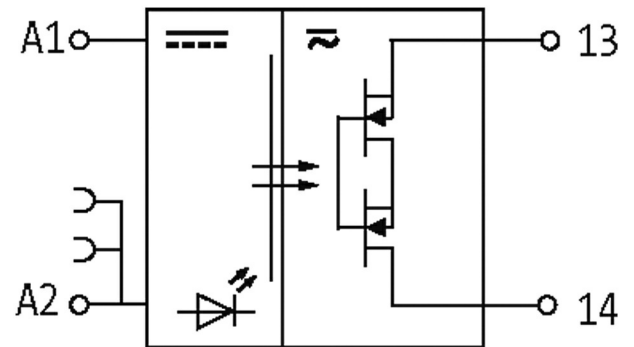

Product may differ from Image

General data

Dimensions HxWxD	78x6.2x70 mm
Test isolation voltage	2.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

Output

Switching time ON/OFF	3/6 ms
Switching voltage	5...250 V AC/5...350 V DC
Switching current per output	1 mA...1 A
Saturation voltage (across output)	max. 0.7 V AC/DC
Leakage current (output is open)	max. 25 µA
Switching frequency	max. 10 Hz

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	10 mA
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879026727
eClass	27371604
Packaging unit	1