




MODLINK MSDD DBL COMBI INSERT VDE ORANGE

2xRJ45 fem./fem. + RCD opening

- 1 × Germany (VDE) orange
- 1 × RJ45, 8-pole metal, CAT5e (female/female)
- 1 × FI cut-out

Link to Product

Illustration

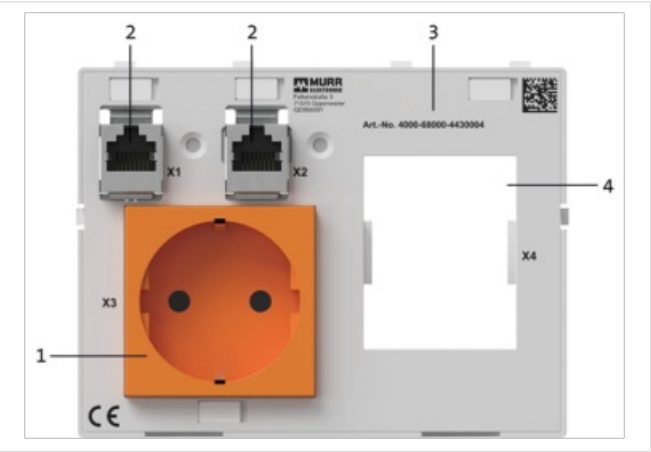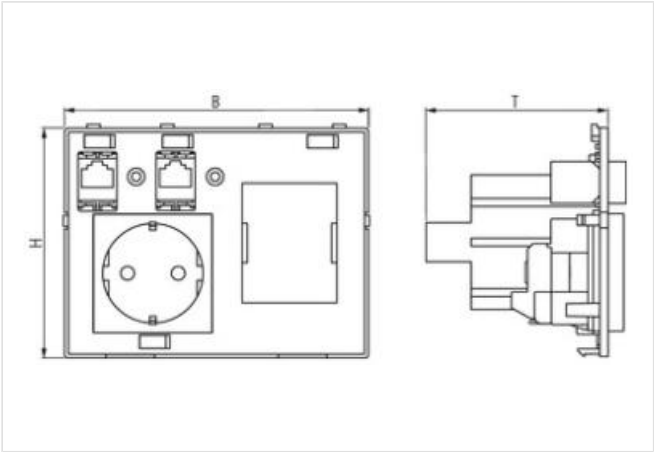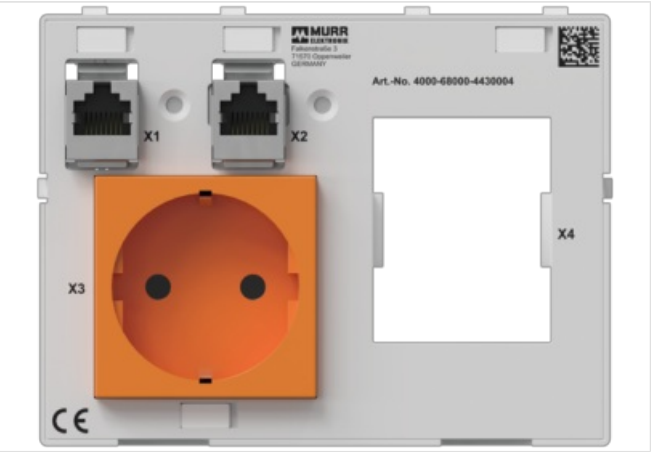

Product may differ from Image



General product information	
Manufacturer name	Murrelektronik
Manufacturer product designation	Fr. Modul VDE orange + 2xRJ45, RCD-cutout
URI manufacturer	https://www.murrelektronik.com/
URI product	https://shop.murrelektronik.com/4000-68000-4430004
Commercial data	
ECLASS-6.0	27189217

ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27182806
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC000020
customs tariff number	85366990
GTIN	4065909069639
Packaging unit	1

Compatibility | Compatible with

~	4000-68522-0000001 Rahmenmodul 2-fach transp. 3mm Doppelb.
~	4000-68524-0000003 Rahmenmodul 2-fach grau Daimler
~	4000-68524-0000001 Rahmenmodul 2-fach grau 3mm Doppelbart
~	4000-68523-0000003 Rahmenmodul 2-fach metallic Daimler
~	4000-68523-0000001 Rahmenmodul 2-fach metallic 3mm Doppelb.
~	4000-68522-0000003 Rahmenmodul 2-fach transparent Daimler

Device protection | Electrical

Installation height max. ASL	2000 m
Degree of protection front (EN IEC 60529)	IP20
Degree of protection back (EN IEC 60529)	IP00
Pollution Degree	2

Mechanical data | Material data

Material designation plate	PC
Material combination insert	PBT

Mechanical data | Mounting data

Net weight	115 g
Height	87,5 mm
Width	115,5 mm
Depth	69 mm

Environmental characteristics | Climatic

Operating temperature min.	-5 °C
Operating temperature max.	50 °C
Storage temperature min.	-10 °C
Storage temperature max.	70 °C
Environmental class (IEC 60721)	3K3

Environmental product conformity

REACH	(EC) No 1907/2006
REACH-SVHC	(EC) No 1907/2006
RoHS	2011/65/EU - Exception 6(c)
China RoHS	SJ/T 11364-2014 - EPUP-50
California Proposition 65	California Prop. 65
WEEE	2012/19/EU

Conformity

CE	2014/35/EU, 2011/65/EU
----	------------------------

Equipment 1

Stripping length	13 mm
Connection	Spring clamp terminals FK
Country version	Germany
Connection cross section max.	2,5 mm ²

Power frequency	50 Hz
Nominal voltage AC max.	250 V
Nominal current	16 A
Color housing	orange
Material housing	PC
No. of poles	2 + PE
Protection contact present	yes

Equipment 2

Version network interface	Gender Changer
Family construction form	RJ45
Gender	female
Cable category min.	Cat5e
Mating cycles min.	50
Operating voltage AC max.	30 V
Operating voltage DC max.	42,4 V
Operating current max.	175 mA
Shielded	yes
Mounting method	inserted, Snap-in connector
Coating housing	tin-plated
Coating contact	gold plated
Combustibility class housing (UL94)	V-0
Material contact	Phosphor bronze
No. of poles	8

Equipment 3

Connection	Thread , M4
Tightening torque	0,9 Nm
Material Shield plate	stainless steel 1.4301 (V2A)

Equipment 4

Cutout	for FI/LS circuit breaker
Equippable with	Siemens 5SU1356-7KK10, or identical in construction