

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24...230V LED PG9

Form A (18 mm) for pressure switch 24...230 V AC/DC LED red (2) green (1)

PG9


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







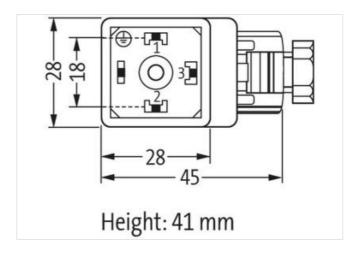

Product may differ from Image









J	Ц	u	е	

Mounting method inserted, screwed

Degree of protection (EN IEC 60529) IP65

Commercial data

ECLASS-6.0 27279221

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-13



ECLASS-7.0	27440104		
ECLASS-8.0	27440104		
ECLASS-9.0	27440102		
ECLASS-10.1	27440105		
ECLASS-11.1	27440105		
ECLASS-12.0	27440105		
ETIM-5.0	EC002062		
customs tariff number	85366990		
GTIN	4048879187473		
Packaging unit	1		
Electrical data Supply			
Operating voltage AC min.	24 V		
Operating voltage AC max.	230 V		
Operating voltage DC min.	24 V		
Operating voltage DC max.	230 V		
Current operating per contact max.	4 A		
Diagnostics			
Status indication LED	green, red		
Installation			
Connection cross section max.	1,5 mm²		
Installation Connection			
Tightening torque	0,4 Nm		
Mounting set	M3		
Device protection Electrical			
Additional condition protection degree	inserted, locked, with screw connection		
Pollution Degree	2		
Rated surge voltage	4 kV		
Material group (IEC 60664-1)	III		
Mechanical data Mounting data			
Mounting method	PG9, field-wireable		
Clamping range min.	5 mm		
Clamping range max.	9,5 mm		
Environmental characteristics Climatic			
Operating temperature min.	-20 °C		
Operating temperature max.	60 °C		
Important installation notes			
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.		
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.		