

**M12 male 0° D-cod. with cable shielded**

TPE 22AWG SF/UTP CAT5e gn UL/CSA. ITC/PLTC 7.5m

USA

Ethernet CAT5

Male straight

M12, 4-pole




D-coded

shielded




Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

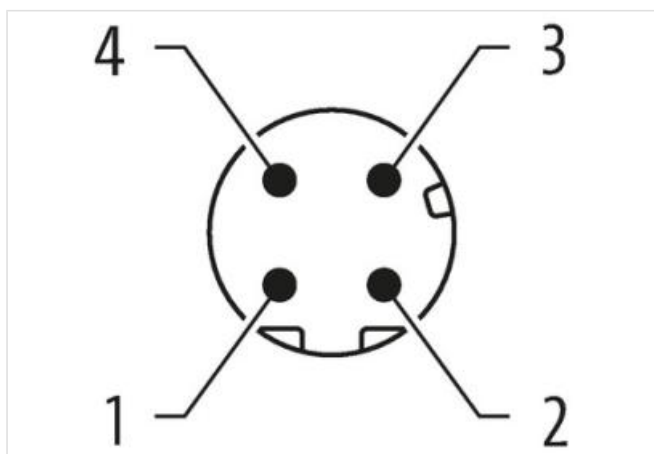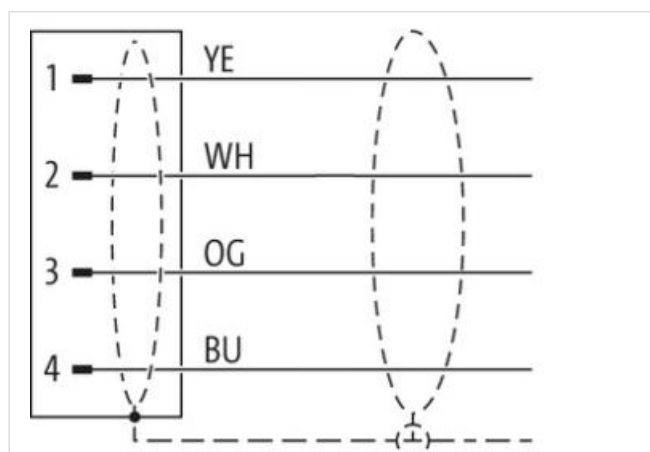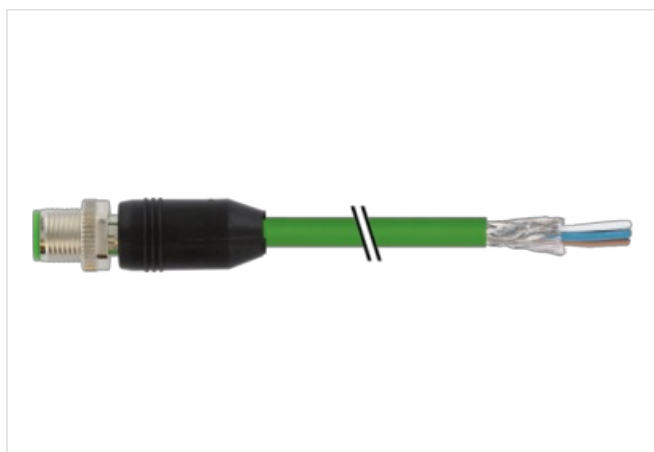[Link do produto](#)**Ilustração**

Produto pode diferir da imagem

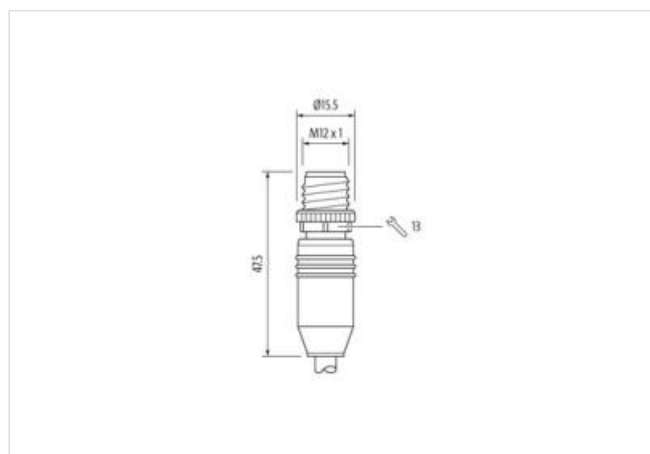

Cable length

7,5 m

| Side 1                                            |                                                                                                     |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Tightening torque                                 | 0,6 Nm                                                                                              |
| Mounting method                                   | inserted, screwed                                                                                   |
| Family construction form                          | M12                                                                                                 |
| Thread                                            | M12 x 1                                                                                             |
| Coding                                            | D                                                                                                   |
| No. of poles                                      | 4                                                                                                   |
| Width across flats                                | SW13                                                                                                |
| Side 2                                            |                                                                                                     |
| Stripping length (jacket)                         | 20 mm                                                                                               |
| Dados comerciais                                  |                                                                                                     |
| ECLASS-6.0                                        | 27279218                                                                                            |
| ECLASS-7.0                                        | 27279218                                                                                            |
| ECLASS-8.0                                        | 27279218                                                                                            |
| ECLASS-9.0                                        | 27060311                                                                                            |
| ECLASS-10.1                                       | 27060307                                                                                            |
| ECLASS-11.1                                       | 27060307                                                                                            |
| ECLASS-12.0                                       | 27060307                                                                                            |
| ETIM-5.0                                          | EC002599                                                                                            |
| Classificação fiscal                              | 85444290                                                                                            |
| GTIN                                              | 4048879601399                                                                                       |
| Quantidade por embalagem                          | 1                                                                                                   |
| Electrical data   Supply                          |                                                                                                     |
| Operating voltage DC max.                         | 60 V                                                                                                |
| Current operating per contact max.                | 1,5 A                                                                                               |
| Industrial communication                          |                                                                                                     |
| Transfer parameters                               | CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)                                                    |
| Data transmission rate max.                       | 100 MBit/s                                                                                          |
| Industrial communication   Ethernet functionality |                                                                                                     |
| duplex                                            | Full duplex                                                                                         |
| Installation   Connection                         |                                                                                                     |
| Stripping length (jacket)                         | 20 mm                                                                                               |
| Device protection   Electrical                    |                                                                                                     |
| Degree of protection (EN IEC 60529)               | IP65, IP67, IP66K                                                                                   |
| Additional condition protection degree            | inserted, screwed                                                                                   |
| Pollution Degree                                  | 3                                                                                                   |
| Rated surge voltage                               | 1,5 kV                                                                                              |
| Material group (IEC 60664-1)                      | I                                                                                                   |
| Mechanical data                                   |                                                                                                     |
| Contour for corrugated hose                       | without                                                                                             |
| Mechanical data   Material data                   |                                                                                                     |
| Coating locking                                   | nickel plated                                                                                       |
| Locking material                                  | Zinc die-casting                                                                                    |
| Environmental characteristics   Climatic          |                                                                                                     |
| Operating temperature min.                        | -25 °C                                                                                              |
| Operating temperature max.                        | 85 °C                                                                                               |
| Additional condition temperature range            | depending on cable quality                                                                          |
| Important installation notes                      |                                                                                                     |
| Note on strain relief                             | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |

Note on bending radius

**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

#### Conformity

Product standard      DIN EN 61076-2-101 (M12)

#### Installation | Cable

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| wire arrangement                         | (white, blue), (orange, yellow)                      |
| Cable identification                     | S7V                                                  |
| Jacket Color                             | green                                                |
| Type of Certificate                      | cURus                                                |
| Amount stranding                         | 2                                                    |
| Stranding                                | 2 wires twisted                                      |
| Amount stranding (type 2)                | 1                                                    |
| Stranding (type 2)                       | 2 Stranded joints twisted                            |
| Cable shielding (type)                   | copper braid, tinned                                 |
| Cable shielding (coverage)               | 75 %                                                 |
| Banding                                  | Foil                                                 |
| wire arrangement                         | (white, blue), (orange, yellow)                      |
| Cable weight                             | 74,8 g/m                                             |
| Material jacket                          | TPE                                                  |
| Freedom from ingredients (jacket)        | lead-free, CFC-free, halogen-free                    |
| Outer-diameter (jacket)                  | 7,87 mm                                              |
| Tolerance outer diameter (sheath)        | ± 5 %                                                |
| Material wire insulation                 | HDPE                                                 |
| Amount wires                             | 4                                                    |
| Outer diameter insulation                | 1,47 mm                                              |
| Outer diameter tolerance core insulation | ± 5 %                                                |
| Ingredient freeness wire insulation      | lead-free, CFC-free, halogen-free                    |
| Amount strands (wire)                    | 19                                                   |
| Diameter of single wires                 | 22 AWG                                               |
| Conductor crosssection (wire)            | 22 AWG                                               |
| Material conductor wire                  | copper stranded wire, tinned                         |
| Nominal voltage AC max.                  | 600 V                                                |
| Min. operating temperature (static)      | -40 °C                                               |
| Max. operating temperature (fixed)       | 80 °C                                                |
| UV resistance                            | DIN EN ISO 4892-2 A                                  |
| Flame resistance                         | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090  |
| chemical resistance                      | Good, application-related testing                    |
| Gasoline resistance                      | Good, application-related testing                    |
| Oil resistance                           | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                   | 8 x Outer diameter                                   |
| No. of bending cycles (C-track)          | 35 Mio. @ 25 °C                                      |
| No. of torsion cycles                    | 5 Mio. 25 °C                                         |
| Torsion stress                           | ± 180 °/m                                            |