

M12 FEMALE 0°



PUR 3X0.34 black UL/CSA + ROBOT, drag ch 1.5m

Female



M12, 4

Art-No. 7005 -M12 Lite (,) .

stay connected

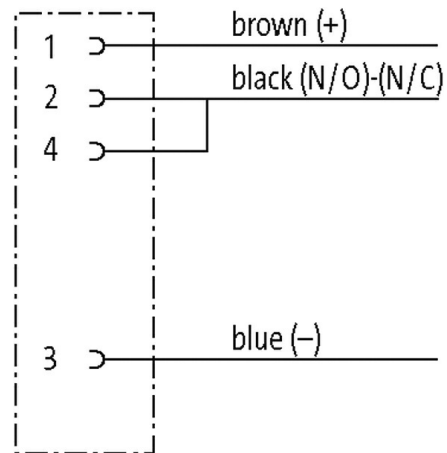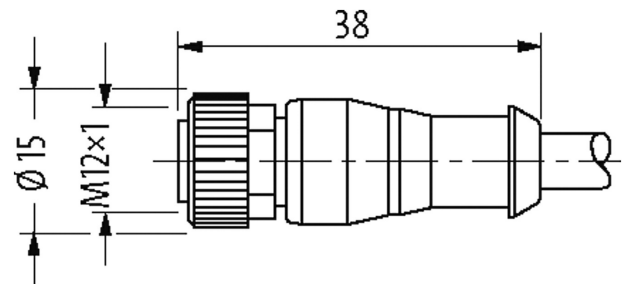

Female

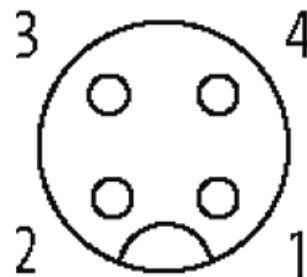

* UL/CSA

CE

EAC

12161

3 x 0.34 mm²

PP (,,)

C-track	10 Mio.
	PUR (UL/CSA), welding spark
	4.3 mm \pm 5%
()	10 \times \emptyset
()	-40...+80 °C
()	-25...+80 °C
	653
	5 (PUR schweißfunkenbeständig)
()	cRUus (AWM-Style 20549/10493); CE conform
[G/m]	29,70
(wire)	,
()	max. 60 Ω /km (20 °C)
\emptyset	0.1 mm
()	42 \times 0.1 mm (6)
()	3 \times 0.34 mm ²
AWG	AWG 22
()	PP
()	CFC, , , ,
()	74 \pm 3 D
\emptyset	1.25 mm \pm 5%
/	, ,
	3
(shielded)	no
	PUR
()	CFC, , , , , , , , , , ,
()	58 \pm 3 D
\emptyset ()	4.3 mm \pm 5%
()	, , (EN 60811-404)
	300 V AC
	2500 V AC
	DIN VDE 0298-4
()	-40...+80 °C, (+90 °C 10 000)
()	-25...+80 °C, (+90 °C 10 000)
()	5 \times \emptyset
()	10 \times \emptyset
(C-track)	max. 10 Mio. (25 °C)
(C-Track)	max. 5 m (horizontal)
(C-track)	max. 3.3 m/s
(C-track)	max. 5 m/s ²
	\pm 360°/m
	max. 1 Mio. (25 °C)
	35
	max. 250 V AC/DC
(UL)	30 V AC/DC
	2.5 kV
	max. 4 A
	4

	IEC 60664-1, category I
	A-coded
LED	no
	(M12×1 mm) 0.6 Nm ,
	M12 (SW13)
	IP65, IP66K, IP67 (EN 60529)
Locking	,
	PUR
(-Ø)	10 mm
	DIN EN 61076-2-101 (M12)
()	
()	Au
()	FKM
	3
()	20 mm
	-25...+85 °C ()
EAN	4048879419697
eClass	27279218
	85444290
	DE
	1