

**M12 female 0° with cable**




PUR 3x0.34 gy UL/CSA 7,5m

Female



M12, 3

Art-No. 7005 -M12 Lite ( , ) .

stay connected

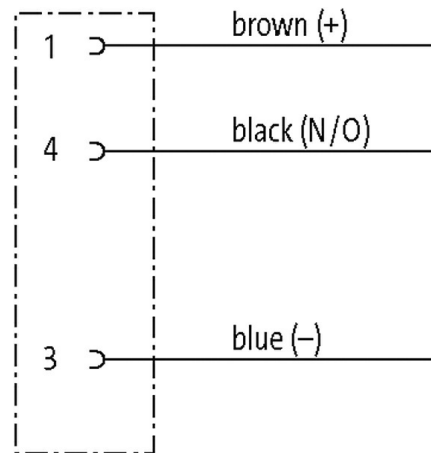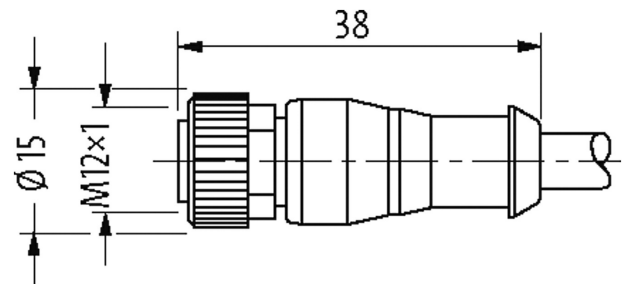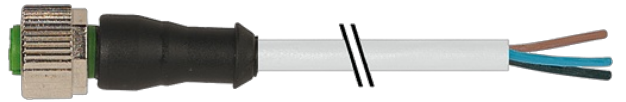

Female

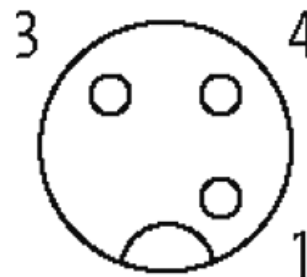

\* UL/CSA    cCSAus    CE    EAC



12181



/                      3 x 0.34 mm<sup>2</sup>  
PVC ( , , )



	M12 (SW13)
	IP65, IP66K, IP67 (EN 60529)
Locking	,
	PUR
( -Ø)	10 mm
	DIN EN 61076-2-101 (M12)
	3
( )	20 mm
	-25...+85 °C ( )
EAN	4048879214049
eClass	27279218
	85444290
	DE
	1