

M12 MALE 0° / M12 FEMALE 0° LED




PVC 4X0.34 YELLOW, UL/CSA 5m

Male – female

M12 – M12, 4



2× LED (PNP), (NPN -)


Art-No. 7005 -M12 Lite (,)

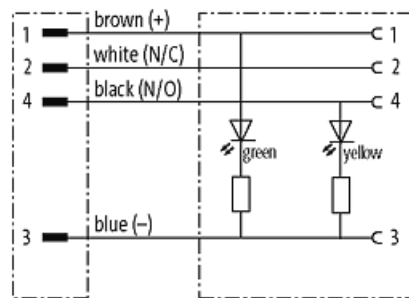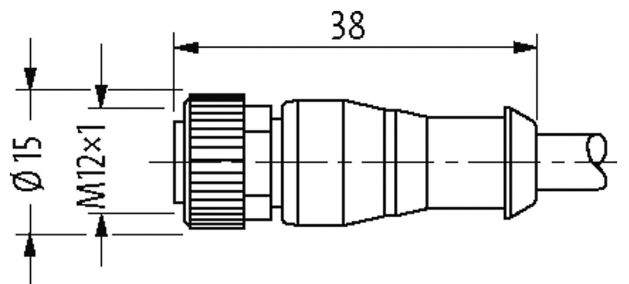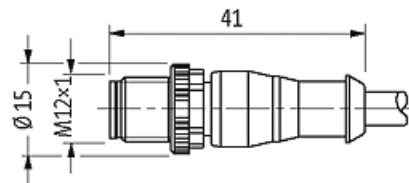

Male

Female





* UL/CSA

	40311
/	4 × 0.34 mm ²
	PVC (, , ,)
	PVC (UL/CSA)
	5.0 mm ±5%
()	10 × Ø
()	-30...+80 °C
()	-5...+80 °C
	014
	1 (PVC)
()	UL (AWM-Style 2464/1731), CSA
[G/m]	40,70
(wire)	,
()	max. 60 Ω/km (20 °C)
-Ø	0.15 mm
()	19 × 0.15 mm (5)
()	4 × 0.34 mm ²
AWG	AWG 22
()	PVC
()	CFC, , ,
()	45 ±5 D
-Ø	1.25 mm ±5%
/	, , ,
	4
(shielded)	no
	PVC
()	CFC, , ,
()	85 ±5 A
-Ø ()	5.0 mm ±5%
()	,
	UL 300 V AC
	2000 V AC
	DIN VDE 0298-4
()	-30...+80 °C
()	-5...+80 °C
()	5 × Ø
()	10 × Ø
	24 V DC ±25%
(UL)	max. 30 V DC
	max. 4 A
	0.8 kV

	IEC 60664-1, category I
	A-coded
LED	/
	(M12×1 mm) 0.6 Nm ,
	M12 (SW13)
	IP65, IP66K, IP67 (EN 60529)
Locking	,
	PUR
(-Ø)	10 mm
	DIN EN 61076-2-101 (M12)
	3
	-25...+85 °C ()
EAN	4048879440004
eClass	27279218
	85444290
	DE
	1