

**M12 male 0° / M12 female 0° LED**





PVC 4x0.34 gy UL/CSA 5m

Male – female

M12 – M12, 4



2x LED (PNP), (NPN - )


Art-No. 7005 -M12 Lite ( , )

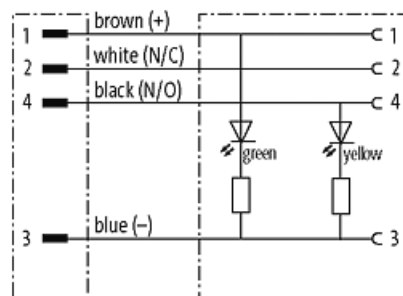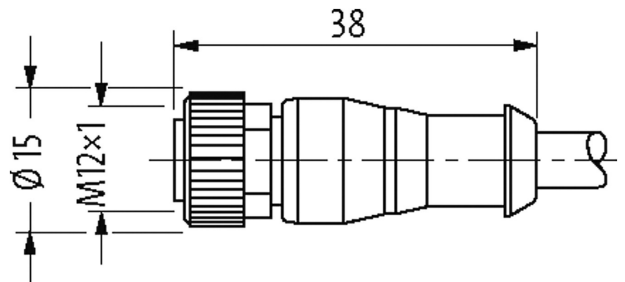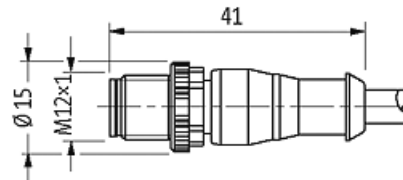

Male

Female





\* UL/CSA

	40311
	214
	1 (PVC)
( )	UL (AWM-Style 2464/1731), CSA
[G/m]	40,70
(wire)	,
( )	max. 60 Ω/km (20 °C)
-Ø	0.15 mm
( )	19× 0.15 mm (5 )
( )	4× 0.34 mm <sup>2</sup>
AWG	AWG 22
( )	PVC
( )	CFC, , ,
( )	45 ±5 D
-Ø	1.25 mm ±5%
/	, , ,
	4
(shielded)	no
	PVC
( )	CFC, , ,
( )	85 ±5 A
-Ø ( )	5.0 mm ±5%
( )	, , ,
	UL 300 V AC
	2000 V AC
	DIN VDE 0298-4
( )	-30...+80 °C
( )	-5...+80 °C
( )	5× Ø
( )	10× Ø
/	4× 0.34 mm <sup>2</sup>
	PVC ( , , , )
	PVC (UL/CSA)
	5.0 mm ±5%
( )	10× Ø
( )	-30...+80 °C
( )	-5...+80 °C
	24 V DC ±25%
(UL )	max. 30 V DC
	max. 4 A
	0.8 kV

	IEC 60664-1, category I
	A-coded
LED	/
	(M12×1 mm) 0.6 Nm ,
	M12 (SW13)
	IP65, IP66K, IP67 (EN 60529)
Locking	,
	PUR
( -Ø)	10 mm
	DIN EN 61076-2-101 (M12)
	3
	-25...+85 °C ( )
EAN	4048879524612
eClass	27279218
	85444290
	DE
	1