

**M12 male 0° with cable V2A**




PVC 5x0.34 gy UL/CSA 2m

Male

M12, 5


1.4305 (V2A)


Art-No. 7005 -M12 Lite ( , )

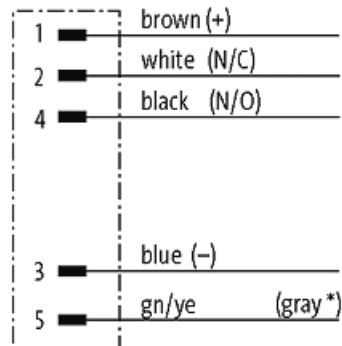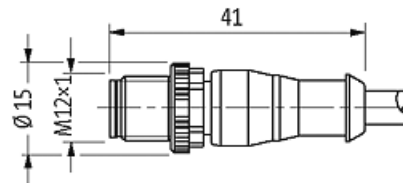

(\* for cable type 126, 732, 219, 619)

**Male**

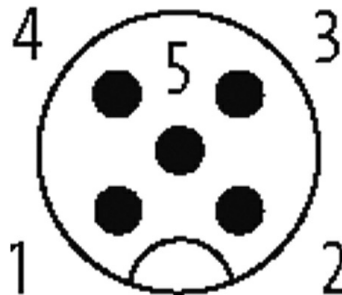



\* UL/CSA

12041	
/	5 × 0.34 mm <sup>2</sup>
	PVC ( , , , / )
	PVC (UL/CSA)
	5.2 mm ±5%
( )	10 × Ø
( )	-30...+80 °C
( )	-5...+80 °C
	215
	1 (PVC)
( )	UL (AWM-Style 2464/1731), CSA
[G/m]	48,40
(wire)	,
( )	max. 60 Ω/km (20 °C)
-Ø	0.15 mm
( )	19 × 0.15 mm (5 )
( )	5 × 0.34 mm <sup>2</sup>
AWG	AWG 22
( )	PVC
( )	CFC, , ,
( )	45 ±5 D
-Ø	1.25 mm ±5%
/	, , , , / ( )
	5 .
(shielded)	no
	PVC
( )	CFC, , ,
( )	85 ±5 A
-Ø ( )	5.2 mm ±5%
( )	,
	UL 300 V AC
	2000 V AC
	DIN VDE 0298-4
( )	-30...+80 °C
( )	-5...+80 °C
( )	5 × Ø
( )	10 × Ø
	max. 125 V AC/DC
(UL )	max. 30 V AC/DC
	1.5 kV
	max. 4 A

	5
	IEC 60664-1, category I
	A-coded
LED	no
	(M12×1 mm) 0.6 Nm ,
	M12 (SW13)
	IP65, IP66K, IP67 (EN 60529)
Locking	1.4305 (V2A)
	PUR
( -Ø)	10 mm
	3
( )	20 mm
	-25...+85 °C ( )
EAN	4048879768399
eClass	27279218
	85444290
	DE
	1