

DESINA HYBRIDFIELDBUS

PUR 2x0.34 + 4x1,5 violet 10m

DESINA® ECOFAST®

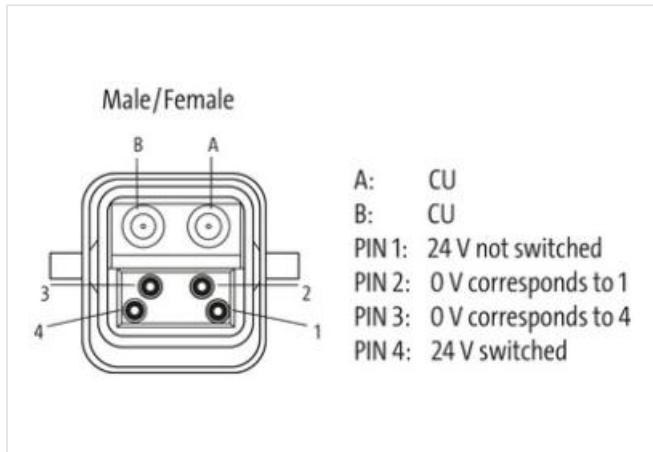
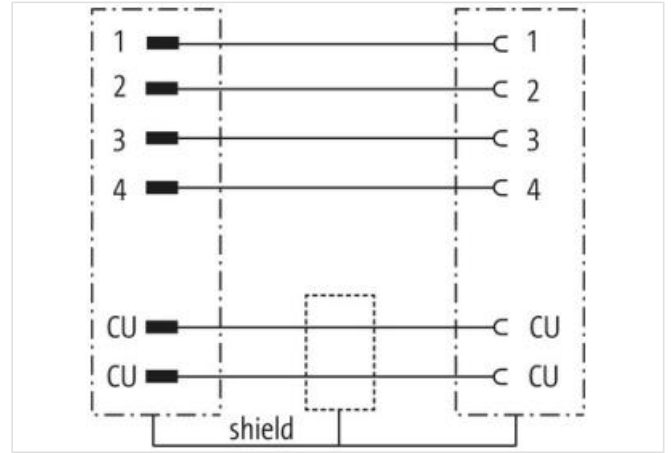
Male straight – female straight
6-pole, CU
shielded

Further cable lengths on request.

Han-Brid ® a registered trademark of HARTING KGaA.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Ürün Linki**örnekleme**

Ürün Image farklı olabilir

Cable length 10 m

Side 1

Mounting method inserted

Material PC

Degree of protection (EN IEC 60529) IP65

Ticari bilgiler

Bu veri sayfasındaki bilgiler en büyük özenle hazırlandı.

Bilgilerin doğruluğu bütünlüğü ve güncelliği konusunda yükümlülük ihmalî sınırlıdır. Sürüm: 2024-05-12

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

ECLASS-6.0	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060311
ETIM-5.0	EC001855
GTIN	4048879186780
Gümrük tarife no (gtip)	85444290
Paket miktarı	1
Electrical data Supply	
Operating voltage AC max.	24 V
Operating voltage DC max.	24 V
Current operating per contact max.	10 A
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data Material data	
Material screw connection	PC
Mechanical data Mounting data	
Looking techniques	Clip locking
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Installation Cable	
Cable identification	964
Jacket Color	violet
wire arrangement	(black 1, black 2, black 3, black 4), (red, green)
Material jacket	PUR
Outer-diameter (jacket)	10 mm
Tolerance outer diameter (sheath)	± 5 %
Material inner jacket	PVC
Material wire insulation	PVC
Amount wires	4
Conductor crossection (wire)	1,5 mm ²
Material wire insulation (Data)	PVC
Amount wires (Data)	2
Conductor crossection wire (Data)	0,34 mm ²
Min. operating temperature (static)	-30 °C
Max. operating temperature (fixed)	70 °C
Operating temperature min. (dynamic)	-40 °C
Operating temperature max. (dynamic)	60 °C
Flame resistance	IEC 60332-2-2 UL 1581 § 1100 FT2 UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing DIN EN 60811-404
Bending radius (dynamic)	8 x Outer diameter