

7/8" male 0° screw terminal4-pol., max. 1,5mm², 6 -8mm

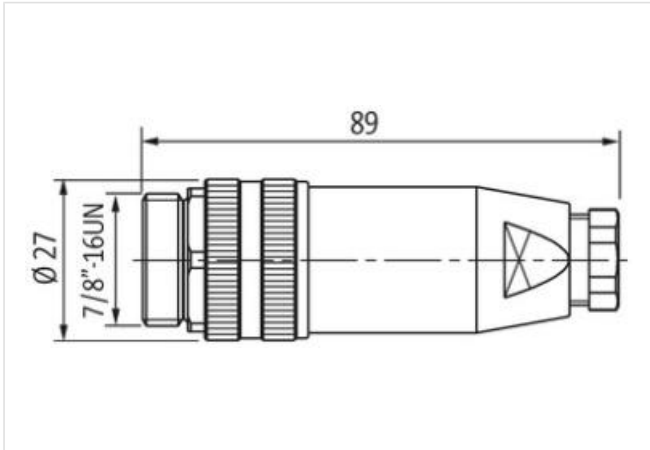
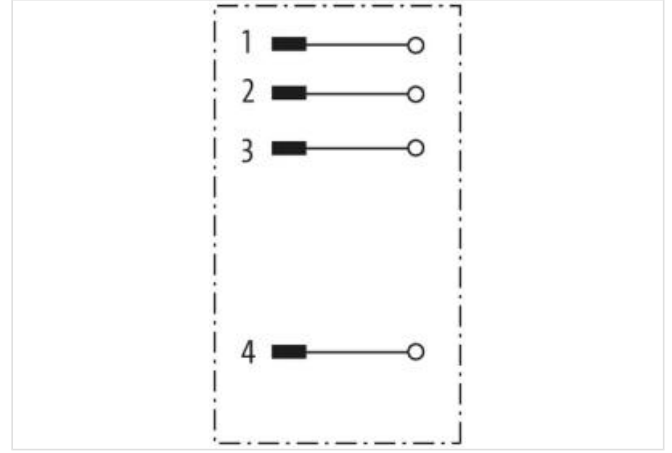
Male straight

7/8" (4-pole)

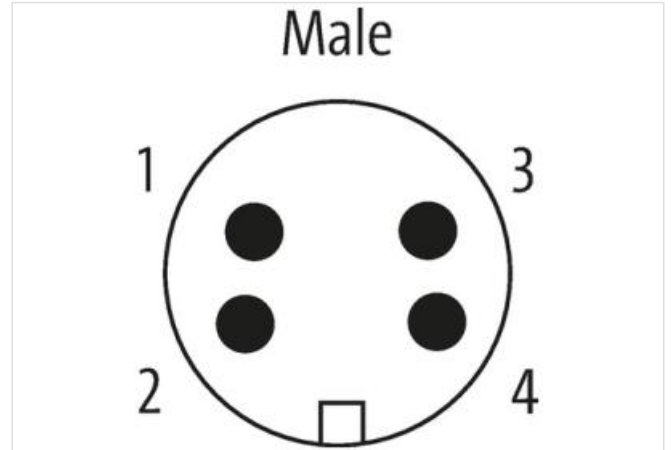
Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Ürün Linki**örnekleme**

Ürün Image farklı olabilir

**Side 1**

Family construction form	7/8"
Material contact	Brass, Bronze
No. of poles	4

Ticari bilgiler

ECLASS-6.0	27279218
------------	----------

Bu veri sayfasındaki bilgiler en büyük özenle hazırlandı.

Bilgilerin doğruluğu bütünlüğü ve güncelliği konusunda yükümlülük ihmalî sınırlıdır. Sürüm: 2024-04-25

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
GTIN	4048879134798
Gümrük tarife no (gtip)	85366990
Paket miktarı	1

Electrical data | Supply

Operating voltage AC max.	300 V
Operating voltage DC max.	300 V
Current operating per contact max.	9 A

Installation

Connection cross section max.	1,5 mm ²
AWG number max.	16

Installation | Connection

Connection	Screw terminals SK
Family construction form	7/8"
Mating cycles min.	50

Device protection

Shielded	no
----------	----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	4 kV
Insulation resistance min.	10000 MΩ
Overvoltage category (EN 60664-1)	III
Overvoltage category (EN 60950-1)	III

Mechanical data | Material data

Coating contact	gold plated
Coating locking	nickel plated
Material housing	PBT
Locking material	Zinc die-casting

Mechanical data | Mounting data

Clamping range min.	6 mm
Clamping range max.	8 mm

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	85 °C