

Mico Pro Potential distributor 2 x 2 x 06

Multiplying two channels 5-times , max 20 A each channel

Mico Pro® PD 2x 2x 06

2 channels per (x5)

Build your own Mico Pro® online:


[START](#)

Ürün Linki

örnekleme



Ürün Image farklı olabilir

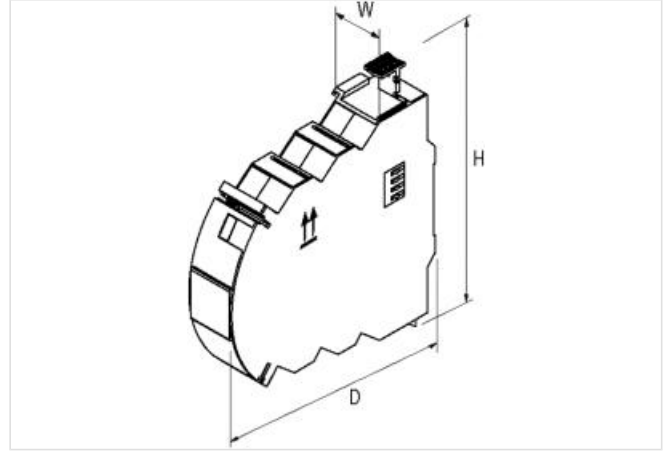

Ticari bilgiler

ECLASS-6.0	27141106
ECLASS-6.1	27371890
ECLASS-7.0	27371890
ECLASS-8.0	27371890
ECLASS-9.0	27371890
ECLASS-10.1	27371892
ECLASS-11.1	27371892
ECLASS-12.0	27371892
ETIM-5.0	EC000489
GTIN	4048879749237
Gümrük tarife no (gtip)	85363030
Paket miktarı	1

Electrical data | Supply

Total current max.	20 A
--------------------	------

Electrical data | Input

Input voltage 1 DC	12 V
Input voltage 2 DC	24 V
Input voltage DC min.	9 V
Input voltage DC max.	30 V

Bu veri sayfasındaki bilgiler en büyük özenle hazırlandı.

Bilgilerin doğruluğu bütünlüğü ve güncelliği konusunda yükümlülük ihmalî sınırlıdır. Sürüm: 2024-05-13

Murrelektronik GmbH | Falkenstrasse 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Total current bridge set max. 40 A

Installation

Connection cross-section static min.	0,2 mm ²
Connection cross section static max.	2,5 mm ²
Connection cross-section dynamic min.	0,2 mm ²
Connection cross section dynamic max.	2,5 mm ²
AWG number static min.	14
AWG number static max.	24
AWG number dynamic min.	14
AWG number dynamic max.	24

Installation | Connection

Connection Bridge system

Device protection | Electrical

Degree of protection (EN IEC 60529) IP20

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	130 mm
Width	24 mm
Depth	114 mm

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C

Connection type 9

Family construction form	Bridging Contact
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	0 V
Family construction form	Bridging Contact
Gender	female
Color contact carrier	black
No. of poles	4
PIN 1	On
PIN 2	Ctrl
PIN 3	Alarm
PIN 4	0.9
Family construction form	Bridging Contact
Gender	male
Color contact carrier	black
No. of poles	4
PIN 1	On
PIN 2	Ctrl
PIN 3	Alarm
PIN 4	0.9
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4

PIN 1	6 U 1
PIN 2	6 0 V
PIN 3	12 U 2
PIN 4	12 0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	5 U 1
PIN 2	5 0 V
PIN 3	11 U2
PIN 4	11 0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	4 U 1
PIN 2	4 0 V
PIN 3	10 U 2
PIN 4	10 0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	3 U 1
PIN 2	3 0 V
PIN 3	9 U 2
PIN 4	9 0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	2 U 1
PIN 2	2 0 V
PIN 3	8 U 2
PIN 4	8 0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	1 U 1
PIN 2	1 0 V
PIN 3	7 U 2
PIN 4	7 0 V