

MIRO TEMP. CONVERTER PT100 - 2 /3-LEAD METHOD

IN: 0°C...+100°C - OUT: 0...10 V / (0)4...20 mA



INPUT: 0...100 °C

Screw terminals

Murrelektronik's temperature converters convert a temperature into the usual signal variables (0...10 V, 4...20 mA, 0...20 mA) in conjunction with a PT100 temperature sensor (IEC 751/ EN 60751). For this purpose, the MTW modules supply a constant current which causes a voltage drop at the PT100 resistor. This is linearized and converted into the corresponding output signals at the OUT terminals. All 3 signals can be used simultaneously. The 2-wire technique can be used for short distances between PT100 sensor and MTW module (<5 m). The 3-wire measuring method must be used for longer distances to compensate the measuring line resistance. For this purpose, a 3rd line (same length and design as the two measuring lines) is required. In this case, the factory-equipped bridge connecting E2 and E3 must be removed.

[Link to Product](#)

Illustration

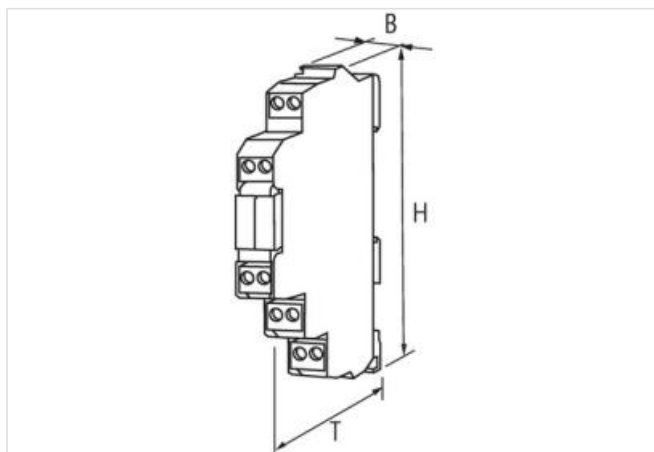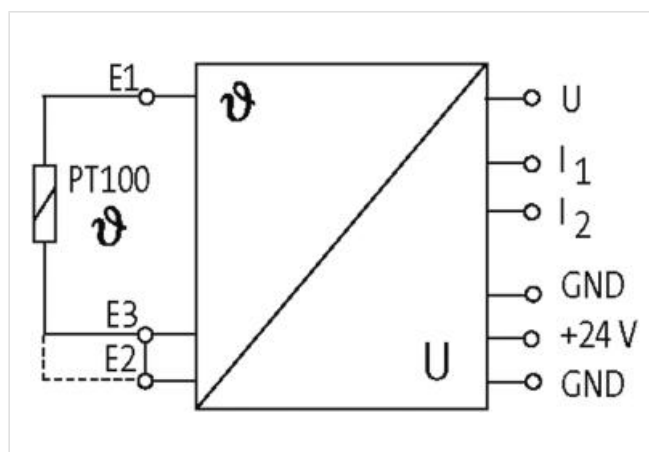

Product may differ from Image



取引条件

ECLASS-6.0

27210990

このデータシートに含まれる情報は最大限の注意を払って作成されました。

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

ECLASS-6.1	27210190
ECLASS-7.0	27210190
ECLASS-8.0	27210190
ECLASS-9.0	27210129
ECLASS-10.1	27210129
ECLASS-11.1	27210129
ECLASS-12.0	27210129
ETIM-5.0	EC001446
GTIN	4048879028240
HSコード	85437090
Packaging unit	1
Electrical data	
Accuracy (of full scale)	1 %
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Operating current max.	80 mA
Electrical data Output	
Load max.	25 mA
Working resistance max.	500 Ω
Device protection Electrical	
Overload protection output	yes
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	90 mm
Width	12,4 mm
Depth	70 mm
Environmental characteristics Climatic	
Operating temperature min.	0 °C
Operating temperature max.	60 °C
Connection type 10	
Connection type 1	X1
Connection type 2	X2
Connection type 3	X3
Connection type 4	X4
Connection type 5	X5
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2
PIN 1	n.c.
PIN 2	E 1
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2

PIN 1	0 V
PIN 2	U
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2
PIN 1	E 3
PIN 2	E 2
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2
PIN 1	I 2
PIN 2	I 1
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2
PIN 1	24 V DC
PIN 2	0 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	+ 24 V DC
PIN 2	- 24 V DC
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	E 3
PIN 2	E 2
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 2	E 1
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	U
PIN 2	0 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	I 1
PIN 2	I 2