

M12 FEMALE 0°

PVC 3X0.34 black UL/CSA 3m



M12, 4

7005 - M12 Lite -


[Link to Product](#)

Illustration


stay connected

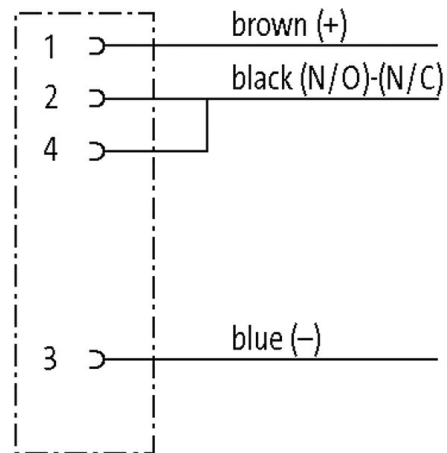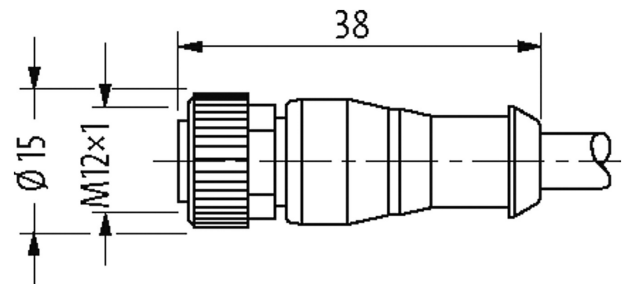

Female

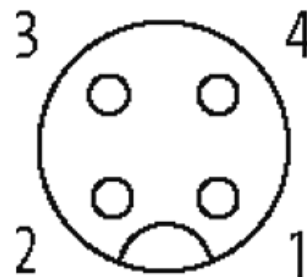

Product may differ from Image



* UL/CSA

CE

EAC

Form

Form 12161

/ 3 x 0.34 mm²

PVC (, ,)

	PVC (UL/CSA)
	4.6 mm ±5%
	10×
	-30...+80 °C
	-5...+80 °C
	613
	1 (PVC)
()	UL (AWM-Style 2464/1731), CSA
[g/m]	34,10
()	max. 60 Ω/km (20 °C)
()	0.15 mm
()	19× 0.15 mm (5)
AWG	AWG 22
	PVC
	CFC
	45 ±5 D
	1.25 mm ±5%
/	
	3
	no
	PVC
)	CFC
Shore hardness (jacket)	85 ±5 A
()	4.6 mm ±5%
()	
	UL 300 V AC
	2000 V AC
	DIN VDE 0298-4
	-30...+80 °C
	-5...+80 °C
	5×
	10×
	max. 250 V AC/DC
UL listed	30 V AC/DC
	2.5 kV
	max. 4 A
	4
	IEC 60664-1, category I
	A
LED	no
	(M12×1 mm) 0.6 Nm
	M12 (SW13)
	IP65, IP66K, IP67 EN 60529
	,
	PUR
()	10 mm

DIN EN 61076-2-101 (M12)

	,
)	
	Au
	FKM
	3
	20 mm
	-25 +85 ,

EAN	4048879214575
eClass	27279218
HS	85444290
Packaging unit	1
	DE