

**M12 FEMALE 0°**

PVC 3X0.34 GRAY, UL/CSA 5m



M12 ,3

7005 - M12 Lite -

[Link to Product](#)

Illustration

stay connected

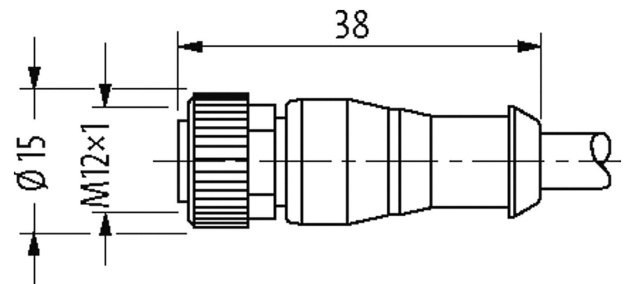

Female



Product may differ from Image



- \* UL/CSA
- cCSAus
- CE
- EAC

**Form**

Form 12181

/ 3 x 0.34 mm<sup>2</sup>

PVC ( , , )

	PVC (UL/CSA)
	4.6 mm ±5%
	10×
	-30...+80 °C
	-5...+80 °C
	213
	1 (PVC)
( )	UL (AWM-Style 2464/1731), CSA
[g/m]	34,10
( )	max. 60 Ω/km (20 °C)
( )	0.15 mm
( )	19× 0.15 mm ( 5)
	3× 0.34 mm <sup>2</sup>
AWG	AWG 22
	PVC
	CFC
	45 ±5 D
	1.25 mm ±5%
/	
	3
	no
	PVC
)	CFC
Shore hardness (jacket)	85 ±5 A
( )	4.6 mm ±5%
( )	
	UL 300 V AC
	2000 V AC
	DIN VDE 0298-4
	-30...+80 °C
	-5...+80 °C
	5×
	10×
	max. 250 V AC/DC
UL listed	max. 30 V AC/DC
	max. 4 A
	2.5 kV
	IEC 60664-1, category I
	3
	A
	(M12×1 mm) 0.6 Nm
	M12 (SW13)
	IP65, IP66K, IP67 EN 60529
	,
	PUR
( )	10 mm

	DIN EN 61076-2-101 (M12)
	3
	,
	20 mm
	-25 +85 ,
<hr/>	
EAN	4048879214162
eClass	27279218
HS	85444290
Packaging unit	1
	DE