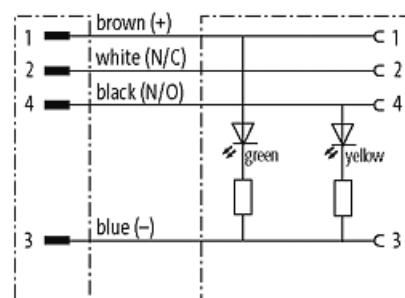
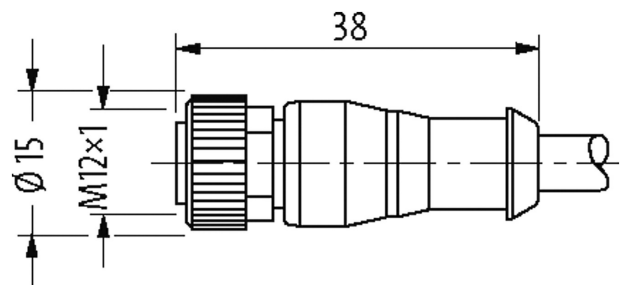
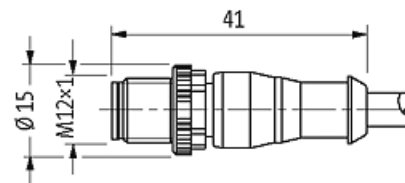



M12 male 0° / M12 female 0° LED



PVC 4x0.34 gy UL/CSA 2m

—
M12 – M12, 4
2× LED (PNP), (NPN)
7005 - M12 Lite -

[Link to Product](#)**Illustration**

Male

Female



Product may differ from Image



* UL/CSA

Form	
Form	40311
	214
	1 (PVC)
()	UL (AWM-Style 2464/1731), CSA
[g/m]	40,70
()	max. 60 Ω /km (20 °C)
()	0.15 mm
()	19 x 0.15 mm (5)
	4 x 0.34 mm ²
AWG	AWG 22
	PVC
	CFC
	45 \pm 5 D
	1.25 mm \pm 5%
/	
	4
	no
	PVC
)	CFC
Shore hardness (jacket)	85 \pm 5 A
()	5.0 mm \pm 5%
()	
	UL 300 V AC
	2000 V AC
	DIN VDE 0298-4
	-30...+80 °C
	-5...+80 °C
	5x
	10x
/	4 x 0.34 mm ²
	PVC (, , ,)
	PVC (UL/CSA)
	5.0 mm \pm 5%
	10x
	-30...+80 °C
	-5...+80 °C
	24 V DC \pm 25%
UL listed	max. 30 V DC
	max. 4 A
	0.8 kV

	IEC 60664-1, category I
	A
LED	/
	(M12×1 mm) 0.6 Nm
	M12 (SW13)
	IP65, IP66K, IP67 EN 60529
	,
	PUR
()	10 mm
	DIN EN 61076-2-101 (M12)
	3
	-25 +85 ,
EAN	4048879524605
eClass	27279218
HS	85444290
Packaging unit	1
	DE