

## stay connected

## **Emergency stop with 2 positive opening**


contacts in a IP65 enclosure


E-Stop 42 2NC L M12(8) with M12 connection 8-pole Emergency-Stop button 2 NC (positively-opening) LED-Ring can be lit mounting with clip on the back side


## **Link to Product**

## Illustration



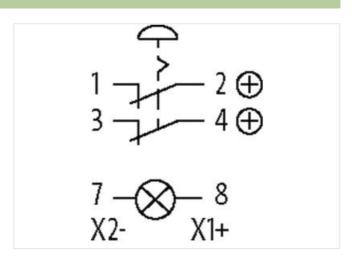





Product may differ from Image







ECLASS-6.0	27371244
ECLASS-6.1	27371244
ECLASS-7.0	27371244

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-05



stay connected

ECLASS-8.0	27371244
ECLASS-9.0	27371244
ECLASS-10.1 ECLASS-11.1	27371244 27371244
ECLASS-11.1	27371244
ETIM-5.0	EC002034
customs tariff number	85365080
GTIN	4048879594219
Packaging unit	1
Electrical data	
Operating voltage AC/DC LED illumination max.	30 V
Operating current LED illumination	4 mA @24 V DC
Electrical data   Supply	
Operating voltage DC min.	1 V
Operating voltage DC max.	36 V
Operating voltage DC (UL Recognized)	30 V
Operating current	1,5 A
Device protection	
Condition lifetime	load-dependent, temperature dependent
Device protection   Electrical	The organization of the second
Degree of protection (EN IEC 60529)	IP65
Electrical lifetime	50000 Cycles
Device protection   Mechanical	
Mechanical endurance	50000 Cycles
Operating life B10d	250000 Cycles
Mechanical data	255555 57555
Bounce time max.	10 ms
Mechanical data   Material data	
Material contact	AgNi
Mechanical data   Mounting data	Agivi
Height Width	52 mm 124 mm
Depth	42 mm
	42.11111
Environmental characteristics   Climatic	05.00
Operating temperature min.	-25 °C
Operating temperature max.  Storage temperature min.	70 °C -25 °C
Storage temperature min.  Storage temperature max.	-25 °C 85 °C
Technical Data   Reliability	
Lambda normally closed contact	20 %
Connection type 1	<u></u>
	M10
Family construction form Gender	M12 male
Color contact carrier	black
Coding	A
No. of poles	8
PIN 1	NC 1
PIN 2	NC 1 +
PIN 3	NC 2



PIN 4	NC 2 +	
PIN 7	X 2 -	
PIN 8	X 1 +	