

## **M8 MALE FLANGE PLUG 1-3-4**

Wire 3x0.25 0.2m


Flange male M8, 3-pole Front mounting with multi-strand wire


## **Link to Product**

## Illustration





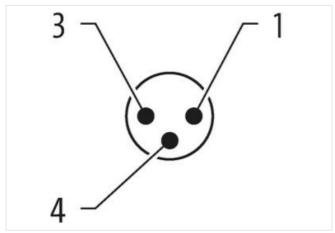

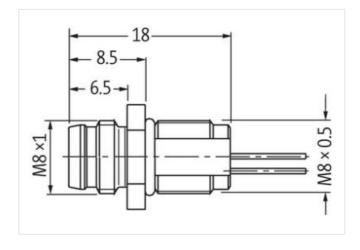

Cable length	0,2 m
Side 1	
Tightening torque	0,4 Nm
Mounting method	inserted, screwed
Family construction form	M8
Thread	M8 x 1
Material	Brass
Degree of protection (EN IEC 60529)	IP66K, IP67
Commercial data	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-28



stay connected

ECLASS-6.0	27279220
ECLASS-7.0	27440103
ECLASS-8.0	27440103
ECLASS-9.0	27440103
ECLASS-10.1	27440103
ECLASS-11.1	27440103
ECLASS-12.0	27440103
ETIM-5.0	EC001855
customs tariff number	85444290
GTIN	4048879224581
Packaging unit	1
	'
Electrical data   Supply	
Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Installation   Connection	
Mounting set	M8 x 1
Device protection   Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data   Material data	
	المعدام المرادة
Coating of fitting	nickel plated
Material screw connection	Brass
Mechanical data   Mounting data	
Mounting method	Schraubgewinde
Looking techniques	Schraubgewinde
Environmental characteristics   Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	1 0 0
	depending on cable quality
Important installation notes	depending on cable quality
	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Important installation notes	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be
Important installation notes  Note on strain relief  Note on bending radius	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)  Operating temperature min. (dynamic)	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C  -25 °C
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)  Operating temperature min. (dynamic)  Operating temperature max. (dynamic)	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C  -25 °C
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)  Operating temperature min. (dynamic)  Flame resistance	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C  -25 °C  90 °C  UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)  Operating temperature min. (dynamic)  Operating temperature max. (dynamic)  Flame resistance  chemical resistance	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C  -25 °C  90 °C  UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  Good, application-related testing
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)  Operating temperature min. (dynamic)  Operating temperature max. (dynamic)  Flame resistance  chemical resistance  Gasoline resistance	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C  -25 °C  90 °C  UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  Good, application-related testing  Good, application-related testing
Important installation notes  Note on strain relief  Note on bending radius  Installation   Cable  Cable identification  wire arrangement  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Conductor crosssection (wire)  Min. operating temperature (static)  Max. operating temperature (fixed)  Operating temperature min. (dynamic)  Operating temperature max. (dynamic)  Flame resistance  chemical resistance	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  970  brown, black, blue  PP  3  1,1 mm  ± 5 %  0,25 mm²  -40 °C  90 °C  -25 °C  90 °C  UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  Good, application-related testing