


MIRO 6.2 OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 0,1 A / 500kHz

Transistor 0.1 A
24 V DC
Switching frequency: max. 500 kHz
Spring clamp terminals

Link do produto

Ilustração

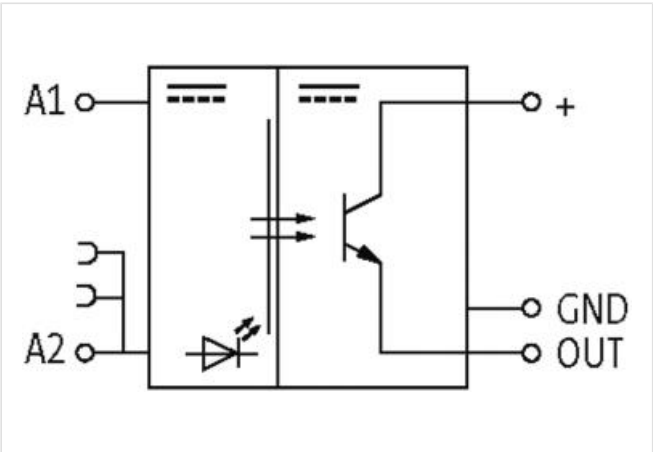

Produto pode diferir da imagem



Dados comerciais	
ECLASS-6.0	27371604
ECLASS-6.1	27371604
ECLASS-7.0	27371604
ECLASS-8.0	27371604
ECLASS-9.0	27371604
ECLASS-10.1	27371604

ECLASS-11.1	27371604
ECLASS-12.0	27371604
ETIM-5.0	EC001504
Classificação fiscal	85414900
GTIN	4048879024372
Quantidade por embalagem	1

Electrical data | Input

Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	7 V
Input voltage DC min.	10 V
Input voltage DC max.	30 V
Current input DC	5,5 mA

Electrical data | Output

Switch off delay max.	0,1 µs
Quiescent current OFF max.	0,25 mA
Switching frequency ohmic max.	500000 Hz
Voltage switching DC min.	5 V
Switching voltage DC max.	48 V
Switching current min.	0 mA
Switching current max.	0,1 A
Voltage drop AC max.	1,2 V
Voltage drop DC max.	1,2 V

Diagnostics

Status indication LED	yellow
-----------------------	--------

Device protection | Electrical

Rated insulation voltage	2750 V
--------------------------	--------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Color housing	black
Material housing	Plastic

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	91 mm
Width	6,2 mm
Depth	70 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C