

D/A-CONVERTER 8-BIT - OUTPUT 4 ... 20mA

IN: 8 Bit - OUT: 4 ... 20mA

D/A converter

8 Bit

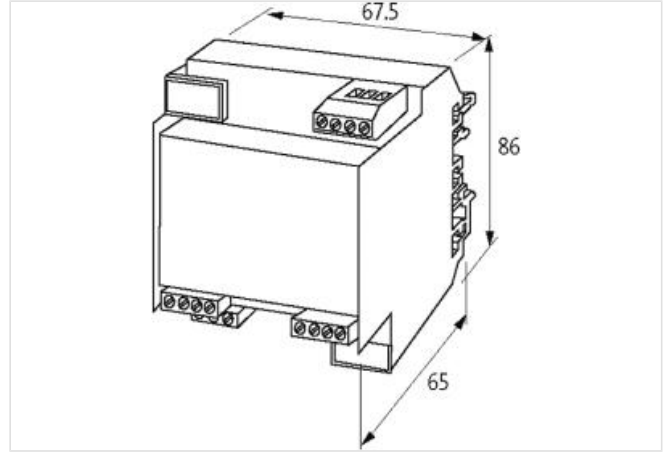
4...20 mA

Input and output galvanically separated

For the converters with voltage output, the maximum output signal can be set to the operating voltage minus 2 V. Due to an internal current limitation the outputs are short-circuit proof and overload protected.

Ürün Linki**örnekleme**

Ürün Image farklı olabilir

**Ticari bilgiler**

ECLASS-6.0	27210990
ECLASS-6.1	27210990
ECLASS-7.0	27210990
ECLASS-8.0	27210990
ECLASS-9.0	27210990
ECLASS-10.1	27210990
ECLASS-11.1	27210990
ECLASS-12.0	27210990
ETIM-5.0	EC002477
GTIN	4048879028615
Gümrük tarife no (gtip)	85437090
Paket miktarı	1

Electrical data

Accuracy (of full scale)	1 %
--------------------------	-----

Electrical data | Supply

Operating voltage DC min.	21 V
Operating voltage DC max.	30 V
Operating current max.	150 mA

Open-circuit current 100 mA

Electrical data | Input

Input signal min. 0 V
Input signal max. 30 V
Input current max. 10 mA

Electrical data | Output

Output current max. 0,04 A

Mechanical data | Mounting data

Mounting method geschnappt
Suitable for mounting type mounting rail, (EN 60715)
Height 65 mm
Width 67,5 mm
Depth 86 mm

Environmental characteristics | Climatic

Operating temperature min. 0 °C
Operating temperature max. 50 °C

Connection type 2

Connection Screw terminals SK
Family construction form terminal
Gender female
No. of poles 6
PIN 1 + US
PIN 2 + US
PIN 3 0 V
PIN 4 0 V
PIN 5 I Out
PIN 6 I Out
Connection Screw terminals SK
Family construction form terminal
Gender female
No. of poles 9
PIN 1 D 8
PIN 2 D 7
PIN 3 D 6
PIN 4 D 5
PIN 5 D 4
PIN 6 D 3
PIN 7 D 2
PIN 8 D 1
PIN 9 0 V 1